



*The Safety Company*

# MSA V-SHOCK® Self-Retracting Devices



# **FASTENAL**®

WE KNOW WHAT'S AT STAKE.

## MSA V-SHOCK Self-Retracting Devices

The MSA V-SHOCK Self-Retracting Device line will deliver simple solutions safety managers need and provide end users the confidence needed to do their job without thinking about their PPE. Focused on ease of use, the V-SHOCK Device uses color coding and icons to communicate critical product attributes—specifically leading edge versus non-leading edge use. The line will also feature clearance charts designed for ease of understanding.

User-focused design elements make the V-SHOCK Self-Retracting Device products easier to use. The leading edge (LE) web PFL allows users to get the job done while working in leading edge scenarios with a product designed to perform in some of the most rigorous environments. Additionally, the LE web PFL bracket design balances the PFLs on the user's back to allow for easier jobsite use.




### Color Coding & Iconography

Make product selection quick and easy

	
<b>Green Housing</b> <i>(Leading Edge)</i>	<b>Gray Housing</b> <i>(Non-Leading Edge)</i>
	
<b>Leading Edge Icon</b>	<b>Non-Leading Edge Icon</b>

### Dashboard Labels

Deliver critical information at a glance

**MSA** V-SHOCK® EDGE PFL 6 ft / 1.8 m

ANSI: 310 lb / 141 kg  
OSHA: 310 lb / 141 kg

© MSA Technology, LLC 2022

**Leading Edge Label**

**MSA** V-SHOCK® PFL 6 ft / 1.8 m

ANSI: 310 lb / 141 kg  
OSHA: 400 lb / 181 kg


© MSA Technology, LLC 2022

**Non-Leading Edge Label**


### Clearance Charts

Designed for ease of understanding

**Leading Edge Clearance Chart**

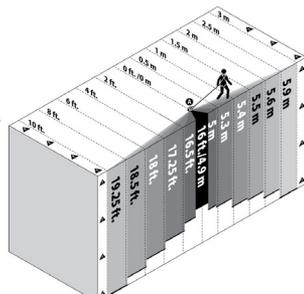

**Non-Leading Edge Clearance Chart**

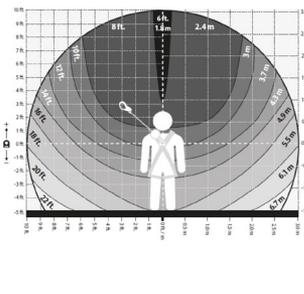

## V-SHOCK Edge Leading Edge SRLs & PFLs

V-SHOCK Edge Leading Edge Galvanized Steel Cable SRL				
Fastenal #	MSA #	Type	Length	Snaphook
924311977	VSLEG-061-NE-A	V-SHOCK Edge	20 ft. (6 m)	36CS
924311968	VSLEG-101-NE-A	V-SHOCK Edge	30 ft. (10 m)	36CS
924311967	VSLEG-151-NE-A	V-SHOCK Edge	50 ft. (15 m)	36CS

V-SHOCK Edge 6 ft. (1.8 m) Leading Edge Web PFL				
Fastenal #	MSA #	Type	Single/Twin	Snaphook
924311956	VSLEW-011-PB-A	V-SHOCK Edge	Single	36C
924311966	VSLEW-011-PE-A	V-SHOCK Edge	Single	36CS
924311954	VSLEW-011-PF-A	V-SHOCK Edge	Single	36CL
924311960	VSLEW-011-PA-A	V-SHOCK Edge	Single	AL36CL
924311979	VSLEW-011-PJ-A-TB	V-SHOCK Edge Tie-Back Edge	Single	FP5K
924311965	VSLEW-012-PB-A	V-SHOCK Edge	Twin	36C
924311964	VSLEW-012-PE-A	V-SHOCK Edge	Twin	36CS
924311955	VSLEW-012-PF-A	V-SHOCK Edge	Twin	36CL
924311971	VSLEW-012-PA-A	V-SHOCK Edge	Twin	AL36CL
924311970	VSLEW-012-PH-A	V-SHOCK Edge	Twin	AL36CLS
924311958	VSLEW-012-PC-A	V-SHOCK Edge	Twin	ALTAKS
924311959	VSLEW-012-PJ-A-TB	V-SHOCK Edge Tie-Back Edge	Twin	FP5K


V-SHOCK Edge 10 ft. (3 m) Leading Edge Web PFL				
Fastenal #	MSA #	Type	Single/Twin	Snaphook
924311976	VSLEW-031-PB-A	V-SHOCK Edge	Single	36C
924311972	VSLEW-031-PE-A	V-SHOCK Edge	Single	36CS
924311952	VSLEW-031-PF-A	V-SHOCK Edge	Single	36CL
924311963	VSLEW-031-PA-A	V-SHOCK Edge	Single	AL36CL
924311957	VSLEW-031-PJ-A-TB	V-SHOCK Edge Tie-Back Edge	Single	FP5K
924311969	VSLEW-032-PB-A	V-SHOCK Edge	Twin	36C
924311951	VSLEW-032-PE-A	V-SHOCK Edge	Twin	36CS
924311953	VSLEW-032-PF-A	V-SHOCK Edge	Twin	36CL
924311963	VSLEW-032-PA-A	V-SHOCK Edge	Twin	AL36CL
924311973	VSLEW-032-PH-A	V-SHOCK Edge	Twin	AL36CLS
924311974	VSLEW-032-PJ-A-TB	V-SHOCK Edge Tie-Back Edge	Twin	FP5K



V-SHOCK Edge Leading Edge PFLs



V-SHOCK Edge Leading Edge SRLs

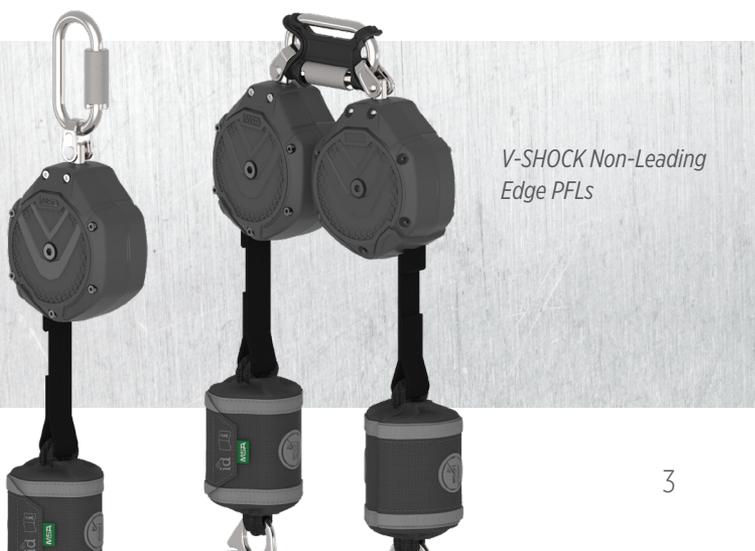

V-SHOCK Non-Leading Edge PFLs

## V-SHOCK Non-Leading Edge PFLs

V-SHOCK 6 ft. (1.8 m) Non-Leading Edge Web PFL				
Fastenal #	MSA #	Type	Single/Twin	Snaphook
924134251	VSOHW-011-NB-A	V-SHOCK	Single	36C
924134261	VSOHW-011-NE-A	V-SHOCK	Single	36CS
924134241	VSOHW-011-NF-A	V-SHOCK	Single	36CL
924134254	VSOHW-011-NG-A	V-SHOCK	Single	AL36C
924134253	VSOHW-011-NA-A	V-SHOCK	Single	AL36CL
924134252	VSOHW-011-NC-A	V-SHOCK	Single	ALAKS
924134250	VSOHW-011-NJ-O-TB	V-SHOCK Tie-Back	Single	FP5K
924134246	VSOHW-012-QB-A	V-SHOCK	Twin	36C
924134243	VSOHW-012-QE-A	V-SHOCK	Twin	36CS
924134257	VSOHW-012-QF-A	V-SHOCK	Twin	36CL
924134242	VSOHW-012-QA-A	V-SHOCK	Twin	AL36CL
924134245	VSOHW-012-QC-A	V-SHOCK	Twin	ALAKS
924134255	VSOHW-012-QJ-O-TB	V-SHOCK Tie-Back	Twin	FP5K

V-SHOCK 10 ft. (3 m) Non-Leading Edge Web PFL				
Fastenal #	MSA #	Type	Single/Twin	Snaphook
924134244	VSOHW-031-NB-A	V-SHOCK	Single	36C
924134262	VSOHW-031-NE-A	V-SHOCK	Single	36CS
924134240	VSOHW-031-NF-A	V-SHOCK	Single	36CL
924134249	VSOHW-031-NA-A	V-SHOCK	Single	AL36CL
924530778	VSOHW-031-NC-A	V-SHOCK	Single	ALAKS
924134259	VSOHW-031-NJ-O-TB	V-SHOCK Tie-Back	Single	FP5K
924134248	VSOHW-032-QJ-O-TB	V-SHOCK Tie-Back	Twin	FP5K

## Snaphooks & Top Connectors

Snaphooks		
		
36C	36CS	36CL
		
AL36C	AL36CL	ALAKS
		
ALAKS		

Top Connectors		
		
Carabiner	Twin Link Clip	Locking Pin Connector

Performance Specifications	
<b>STANDARDS &amp; CAPACITY*</b>	
ANSI Z359.14	130-310 lb. (60-141 kg)
OSHA 1926.502	100-400 lb. (45-181 kg)
<b>ARREST FORCES</b>	
PEAK	1,029 lb. (470 kg)
AVERAGE	800 lb. (366 kg)

\* Both Non-Leading Edge and Lead Edge PFLs should only be utilized for overhead applications for weights between 310 lb. (141 kg) and 400 lb. (181 kg).



Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice. MSA is a registered trademark of MSA Technology, LLC in the US, Europe, and other Countries. For all other trademarks visit <https://us.msasafety.com/Trademarks>.